

# **LINETRAXX® VMD258**

Undervoltage/overvoltage relay for monitoring three-phase AC systems (window function) for power plant applications



## **LINETRAXX® VMD258**

# Undervoltage/overvoltage relay for monitoring three-phase AC systems (window function) for power plant applications



#### **Device features**

- High availability due to purely analogue technology
- Undervoltage and overvoltage monitoring for 3AC systems
- · No separate supply voltage required
- Separate alarm relays for undervoltage and overvoltage with two potential-free changeover contacts
- Adjustable response value:  $0.7...0.95 \times U_n / 1.05...1.3 \times U_n$
- Nominal system voltages: 3AC 690/500/480/440/400/230/110/100 V
- Adjustable response delay: 0...5 s
- LEDs for operation, overvoltage, undervoltage

#### Certifications



## **Product description**

The voltage relay VMD258 monitors three-phase AC systems for undervoltage and over-voltage (window function). Neutral conductor connection is not required, therefore it is suitable for 3AC systems. The device consists of purely analogue technology and is suitable for power plant applications due to its high availability.

The voltage to supply the electronics is taken from the system to be monitored. The supply for the electronics, the relays and the connection for the external energy storage device are isolated from the system by means of double isolation. Special input transformers attenuate interferences from the system.

The response values for undervoltage and overvoltage as well as the response delays are continuously adjustable.

Replaces the SUR35x series.

#### Description of function

When the relay is connected to the mains, within the preset response values, the alarm relays **K1/K2** for undervoltage are in N/C operation (relay **energised**) and die alarm relays **K3/K4** for overvoltage are in N/O operation (relay **deenergised**).

When the value of the nominal system voltage  $U_n$  falls below the set response value  $< U_n$ , the alarm LED "< U" lights up and the alarm relays K1/K2 switch once the set response delay has elapsed.


When the value of the nominal system voltage exceeds  $U_n$  the set response value  $>U_n$ , the alarm LED ">U" lights up and the alarm relays K3/K4 switch once the response delay has elapsed. Once the response values are within the set response range again, the VMD258 switches back to the initial state after approx. 100 ms.

#### Standards


The LINETRAXX® VMD258 series complies with the requirements of the device standards:

- DIN EN 60255-1 VDE 0435-300 (Measuring relays and protection equipment Part 1: Common requirements (IEC 60255-1:2009)
- IEC 60255-127 Measuring relays and protection equipment Part 127: Functional requirements for over/under voltage protection.

# **Operating elements**

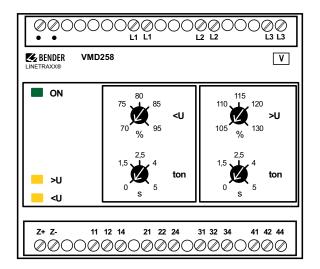

# Wiring diagram

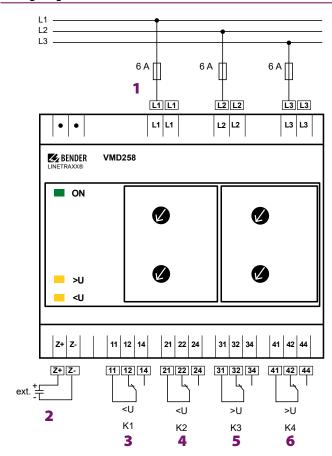

- 1 L1, L2, L3 Connections to the system to be monitored
- 2 Z+ Z- Connection to ES258 for a back-up time > 5 s
- 3 11 12 14 Relay 1
- 4 21 22 24 Relay 2
- **5 31 32 34** Relay 3
- 6 41 42 44 Relay 4



# **Ordering details**


Connection	Туре	Art. No.
3AC, 100 V	VMD258 3AC 100 V	B93010060
3AC, 110 V	VMD258 3AC 110 V	B93010061
3AC, 230 V	VMD258 3AC 230 V	B93010062
3AC, 400 V	VMD258 3AC 400 V	B93010063
3AC, 440 V	VMD258 3AC 440 V	B93010064
3AC, 480 V	VMD258 3AC 480 V	B93010065
3AC, 500 V	VMD258 3AC 500 V	B93010066
3AC, 690 V	VMD258 3AC 690 V	B93010067


## **Accessories**

Designation	Art. No.		
Additional mounting clips (screw mounting)	B98060008		
Energy backup ES258	B93010068		

# **Dimension diagrams**

Dimensions in mm

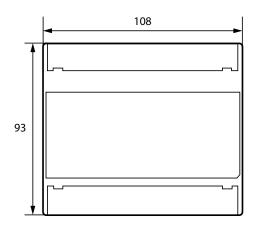




# Diagram operating times $t_{ae}$

As is shown in the diagram below, the operating time ( $t_{ae}$ ) depends on the ratio of the measured voltage ( $U_m$ ) to the switching threshold ( $U_s$ ).

Examples for  $t_{ae}$ :

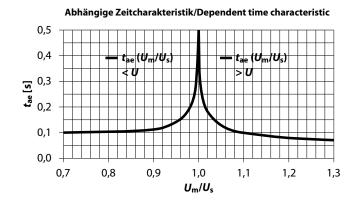

<i>U</i> <sub>m</sub> [%]	<i>U</i> <sub>s</sub> [%]	U <sub>m</sub> /U <sub>s</sub>	<i>t</i> ae [s]
67	70	0,96	0,15
69	70	0,986	0,25
70	95	0,74	0,1
106	105	1,01	0,4
116	105	1,1	0,1
130	105	1,24	0,06



## **Technical data**

Supply voltage $U_S$ AC (V)	690	48	30/500	400	)/440	230	100/	/110
Rated voltage AC (V)	1000		1000		600	300		150
Rated impulse voltage (kV)	12		12		8	6		4
Pollution degree								3
Overvoltage category								III
Voltage ranges								
Frequency range of U <sub>S</sub>							56	
Operating range							1.3	
Short-time overload capability						1.5	x <i>U</i> <sub>S</sub> <	
Power consumption							≤ 10	
Nominal supply voltage $U_S$ 3AC (V)	690	500	480	440	400	230	110	
Power consumption at 50 Hz, 1.3 x $U_S$ (VA)	19	15	12	14	9	16	15	10
Power consumption at 60 Hz, 1.3 x $U_5$ (VA)	11	9	8	8	6	9	9	7
Measuring circuit								
Nominal system voltage U <sub>n</sub>	3A	C 690	)/500/4	180/4	40/400	)/230/1		
Setting range							1.3	
Short-time overload capability							x <i>U</i> <sub>n</sub> <	
Frequency range of Un						4:	56	
Max. permissible measuring voltage	$\begin{array}{c} \text{nge} & \text{1.3 x } \textit{U}_{\text{r}} \\ > \text{U}, < \text{U} \end{array}$							
Response value $U_n$ adjustable							>0,	, < U
Response values								
Undervoltage $< U$ (alarm)						0.7		
Overvoltage >U (alarm)						1.05.		
Relative uncertainty at the setting limits						566		
					47.5	563		
Hysteresis								3 %
Repetition accuracy								1 %
LED ON								een)
Alarm for <u< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td>) (yell</td><td></td></u<>							) (yell	
Alarm for >U						LEI	) (yell	low)
Time response								
Start-up delay t						500 n		
Response delay ton						05		
Delay on release t <sub>off</sub>							ns ±2	
Operating time t <sub>ae</sub> at overvoltage						60 m		
Operating time t <sub>ae</sub> at undervoltage					l	00 ms		
Response time t <sub>an</sub>						t <sub>an</sub> =		
Long-term influence Overshooting time t <sub>ov</sub>								0 %
							< 60	נווו ל
Connection for external energy storage	e devi	ce					-	
U <sub>min</sub>								24 V
U <sub>max</sub>						2 47		68 V
$U_{\text{typ}}$ at 1.0 x $U_{\text{n}}$					4	247		
Short-circuit proof (Z+, Z-)						SHOP	t time	: yes

Switching elements	
Number of switching elements	2 x 2 changeover contacts
Operating mode	N/C operation (undervoltage)
	N/O operation (overvoltage)
Electrical endurance, number of cycles	10000
Contact data acc. to IEC 60947-5-1	
Rated operational voltage	230 V/230 V/ 220/110/24 V
Utilisation category	AC-13/AC-14/DC 12/DC 12/DC 12
Rated operational current	5 A/3 A/ 0,1/0,2/1 A
Minimum current	1 mA at AC/DC > 10 V
Environment/EMC	
EMC immunity	acc. to IEC 60255-26
EMC emission	acc. to IEC 60255-25
Operating temperature	-20+70 °C
Climatic class acc. to DIN IEC 60721-3-3	
Stationary use, except condensation	3K22
Transport	2K11
Long-term storage	1K22
Classification of mechanical conditions acc. to IEC 60721	
Stationary use	3M11
Transport	2M4
Long-term storage	1M12
Requirements acc. to IEC 60255	Class 2
Connection Connection	screw terminals
Connection properties	SCIEW (CIIIIIIais
rigid/flexible	0.22.5 mm <sup>2</sup>
flexible with ferrule	0.252.5 mm <sup>2</sup>
without/with plastic sleeve	0.252.5 mm <sup>2</sup>
Conductor sizes (AWG)	2413
Tightening torque	0.50.6 Nm
Current through L1L1, L2L2 or L3L3	each max. 3 A
Other	Cuch max. J A
Operating mode	continuous operation
Position	any position
1 OSITION	

\* Operating time **t**<sub>ae</sub> **overvoltage** increase from 100 % to 130 %, switching threshold at 105 %

Degree of protection, internal components (DIN EN 60529)

Degree of protection, terminals (DIN EN 60529)

**Enclosure material** 

Flammability class

Screw mounting

Weight

DIN rail mounting acc. to

\*\* Operating time  $t_{ae}$  undervoltage decrease from 100 % to 0 %, switching threshold at 95 %

IP30

IP20

polycarbonate

UL94 V-0

IEC 60715

4 x M4

825 g



# Bender GmbH & Co. KG

